Digital Clocks

PoE (Power over Ethernet)

Our proven, long-trusted technology synchronizes time across campuses, hospitals, and facilities of any size — enhancing efficiency, reducing delays, and ensuring pinpoint accuracy. With automated daylight saving time adjustments and zero disruption, Primex Sync keeps your organization running on time, all the time.

Primex Sync digital clocks are designed to be easily seen from up to 150 feet away and feature highly visible LED digits in a sleek black casing to integrate well into virtually any indoor environment. The onboard control panel allows you to select a variety of options, including alternating date/time and a 12- or 24-hour time display.

Built in PoE means there is no need for additional power source or batteries, as the cable that carries the time data to the clocks also carries power. Primex Sync PoE clocks are delivered preconfigured, ready to quickly access your existing network. Simply take the clocks out of the box, connect to PoE power (Power over Ethernet), and hang them on the wall.

POE SURFACE MOUNT DIGITAL CLOCKS - POE POWERED

4-DIGIT	6-DIGIT	DESCRIPTION
125-PE115G	125-PE135G	Sync Digital Clock, 2.5", Single-sided, Green LED, PoE power, Configured
125-PE115R	125-PE135R	Sync Digital Clock, 2.5", Single-sided, Red LED, PoE power, Configured
125-PE125G	125-PE150G	Sync Digital Clock, 4", Single-sided, Green LED, PoE power, Configured
125-PE125R	125-PE150R	Sync Digital Clock, 4", Single-sided, Red LED, PoE power, Configured



4-Digit Red



6-Digit Green

FLUSH MOUNT KIT

PART NO.	DESCRIPTION
199-000106	Flush Mount Kit, for 2.5" 6-digit clocks only



Surface Mount

ACCESSORIES

PART NO.	DESCRIPTION
199-000032	18 Degree Bracket for 2.5" Digital Clock



Flush-Mount

Dual Clock Kit

Any two surface-mount digital clocks can be mounted back-to-back to provide greater visibility in hallways and larger areas. Select the correct Dual Clock Bracket Kit for your application below.

DUAL CLOCK BRACKET KIT

MOUNT	2.5", 4-DIGIT	2.5", 6-DIGIT	4", 4-DIGIT	4", 6-DIGIT*
Ceiling	198-000005	198-000007	198-000009	198-000009
Wall	198-000006	198-000008	198-000009	NA

* 4" 6-digit clock can be ceiling mount only.



Dual Mount - Ceiling



Dual Mount - Wall


FEATURES

- Highly visible seven-segment LED digits
- Three display dimmer options: 75%, 50%, and 25%
- Power outage memory backup up to one hour
- Choose Red or Green LED digits
- Connectivity:
  - IEEE 802.3 10/100 Base-T Ethernet
- Power:
  - All Models: IEEE PoE 802.3 at/af PoE+ (Class 0, 13 Watts Peak, 5 Watts Nominal)

Security:
- Encryption: TLS 1.3

SINGLE CLOCK DIMENSIONS


CLOCK TYPE	WEIGHT	HEIGHT A	WIDTH B	DEPTH C
2.5" (6.4cm), 4-digit	1.8 lbs. (0.8 kg)	5.0" (12.7cm)	10.8" (27.4cm)	2.8" (5.6cm)
4" (10.16cm), 4-digit	3.9 lbs. (1.8 kg)	8.0" (20.3cm)	17.9" (45.5cm)	2.4" (6.1cm)
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	5.0" (12.7cm)	13.8" (34.9cm)	2.2" (5.6cm)
4" (10.16cm), 6-digit	4.6 lbs. (2.1 kg)	8.0" (20.3cm)	23.3" (59.2cm)	2.4" (6.1cm)




DUAL-MOUNT DIMENSIONS

CLOCK TYPE	WIDTH FROM WALL A	HEIGHT FROM CEILING B	DEPTH OF TWO CLOCKS C
Dual 2.5" (6.4cm), 4-digit	13.8" (35.1cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 4-digit	20.9" (53.1cm)	11.0" (27.9cm)	6.3" (16.0cm)
Dual 2.5" (6.4cm), 6-digit	16.8" (42.7cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 6-digit	NA*	11.0" (27.9cm)	6.3" (16.0cm)

* 4", 6-digit clocks cannot be dual-mounted to the wall.
Note: Dual mount clocks shipped disassembled to simplify installation.

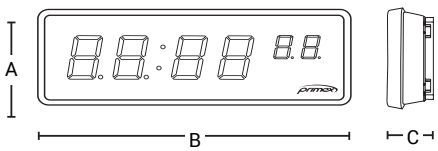


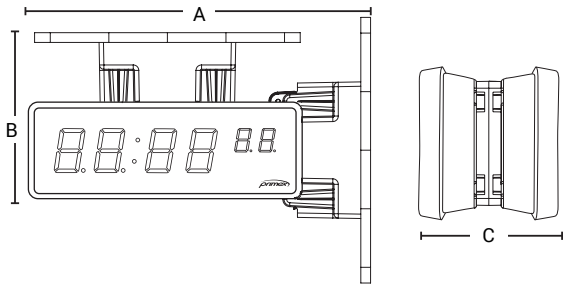

FLUSH-MOUNT DIMENSIONS

CLOCK TYPE	WEIGHT	WIDTH A	HEIGHT B	DEPTH C
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	16.8" (42.7cm)	6.5" (16.5cm)	3.4" (8.6cm)

When ordering for new construction projects, the junction boxes for flush-mount installation may be ordered to ship in advance of clocks. Please request special shipping and provide dates when ordering.

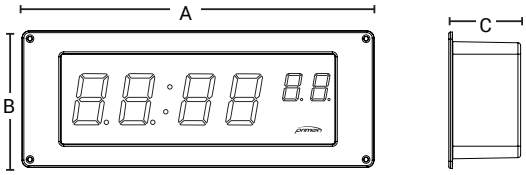


POE power

POE DIGITAL CLOCK SPECIFICATIONS

- 12- or 24-hour time display
- PM indicator light
- Automatically adjust for Daylight Saving Time
- Alternating time and date display option
- LED dimmer option (75%, 50%, 25%)
- Power outage memory backup up to one hour
- **Operating temperature range:** -40F to 140F (-40C to 60C)
- **Storage temperature range:** -40F to 185°F (-40C to 85°C)
- Clock configuration to access your network is accomplished online prior to delivery for plug-and-play convenience
- **Clock Power:**
  - All Models: IEEE PoE 802.3 at/af PoE+ (Class 0, 13 Watts Peak, 5 Watts Nominal)
- **Connectivity:**
  - IEEE 802.3 10/100 Base-T Ethernet
- **Certification:** FCC/IC/CE marked
- **Security:** Encryption: TLS 1.3

To Learn More:
Call - 855-602-2934
Email - info@primexinc.com
primexinc.com

©2025 by Primex, Inc.
The Primex logo is a registered trademark of Primex, Inc. All Rights Reserved. 11.13.26